
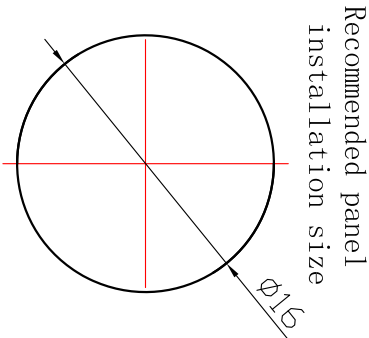


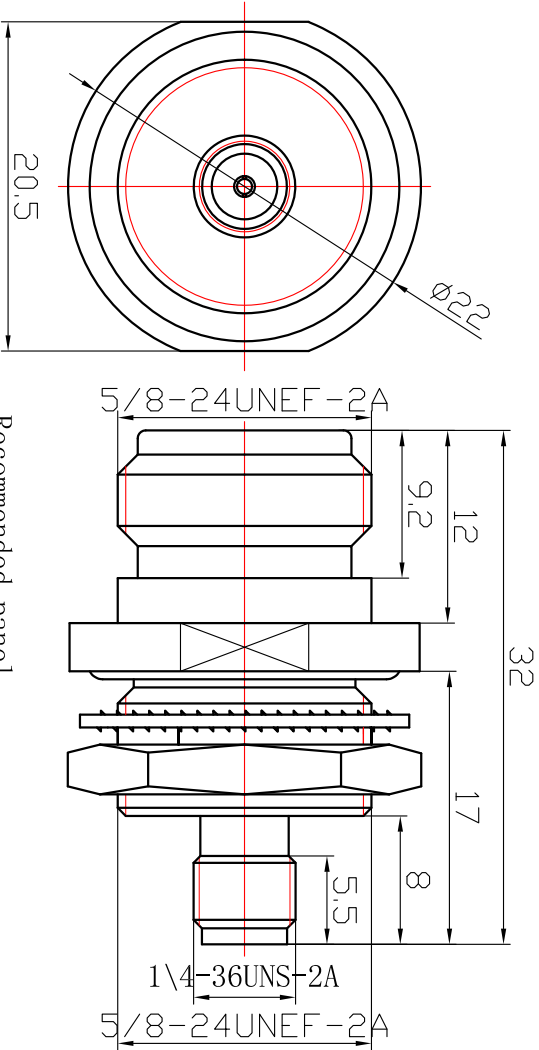


Reversion	Engineering Change Description	Date	Owner
A/0	NEW	2011.04.11	ZXM

Electrical performance	
Characteristic impedance	50Ω
Frequency range	DC to 8 GHz
Standing wave ratio(VSWR)	≤1.15 (DC~8G)
withstand voltage	≤0.2dB@8G
working voltage	335 V rms
Test voltage	1000 V rms
Insulation resistance	≥5000MΩ
Center pin contact resistance	N≤1mΩ, SMA≤3mΩ
Conductor contact resistance	N≤1mΩ, SMA≤2.5mΩ
Center conductor retention force	N≥0.56N, SMA≥0.28N
Intermodulation 3rd order	N/A

Mechanical and environment	
Temperature rating	-40~+125℃
Salt spray test time	96H
Airtight	N/A
durability	≥500 cycles

Materials		
Connector parts	Material	Plating
Center contact	bronze	Au
Outer contact	brass	CuSnZn
Dielectric	PTFE	
Nut	brass	CuSnZn
Gear washer	bronze	CuSnZn



CAD GENERATED DRAWING, DO NOT MANUALLY UPDATE	STANDARD TOLERANCES (Unless stated otherwise)				Product design		 戴盛通信 Dashing Com-Tek Co., Ltd
	Geometric tolerances	Positional tolerance		Design			
Any statements in this article shall not be interpreted as suggesting infringement of existing patents. Individual values may vary depending on factors including but not limited to application, design, cable type, assembly, and others workmanship		X	.X	Drawn		TITLE: N\SMA-50KKY (M)	
		0-6	±0.1	±0.05	Workmanship		
		6-10	±0.1	±0.05	Checked		
	ANGLE ±1°	10-30	±0.15	±0.10	Approvals		Drawing No.: DS3. 650. 349
		>30	±0.15	±0.10	As mension	 	
	Scale:						
Company website: http://www.daisheng.net / Email: ds168@daisheng.net							